

Fittings for Thermo-Pneumatic Detection System



Fittings for Thermo-Pneumatic Detection System

All fittings are inverted flare type. Inverted flare fittings meet the requirements of NAVSEA 03487-078-1000.



8169142
Street Tee
(HSD Test Fitting)




8169141
Male Branch Tee
(HSD Test Fitting)



8084610
1/8" Tubing Tee with
Terminal Nuts
(Used between VCV and
PRPV Manifold)



8084624
1/8" NTP x 1/8" Tubing
90° Ell with Terminal Nut
(Used on HSD)

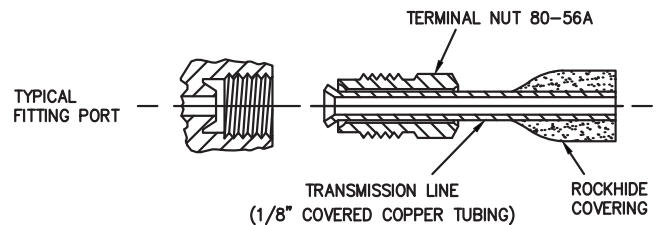

1080056
1/8" Terminal Nut
(Used with all fittings)



1080057
1/8" Tubing Coupling
(shown with 1/8" Terminal
Nut – sold separately)
(Used to make emergency
tube splices)



8084623
1/8" NTP x 1/8" Tubing
Connector with
Terminal Nut
(Used on HSD and VCV)